

Specifications

- Self-supporting pockets
- No special mechanical support required
- Standard pocket filter frames
- Simple and light weight
- Synthetic bags
- Low pressure drop
- Long service life
- Small transport volume
- Rigid bag model available (RB)
- Easy installation




Filter Standard; EN779 and ISO16890
Media; Polyester
Frame type; Galvanized metal (25mm)

Final Pressure Drop; 250 Pa
Max. Operating Temperature; 75° C
Application; Prefilter for HVAC

Filter Model	Filter Class		Dimensions WxHxD (mm)	Pocket Quantity (pcs.)	Nominal Airflow (m³/h)	Initial Pressure Drop (Pa)
	EN779	ISO16890				
GB-G3-P6-592x592x360	G3	Coarse 50%	592x592x360	6	3400	40
GB-G3-P5-490x592x360	G3	Coarse 50%	490x592x360	5	2800	40
GB-G3-P3-287x592x360	G3	Coarse 50%	287x592x360	3	1700	40
GB-G3-P3-287x287x360	G3	Coarse 50%	287x287x360	3	850	40
GB-G4-P6-592x592x360	G4	Coarse 65%	592x592x360	6	3400	50
GB-G4-P5-490x592x360	G4	Coarse 65%	490x592x360	5	2800	50
GB-G4-P3-287x287x360	G4	Coarse 65%	287x592x360	3	1700	50
GB-G4-P3-287x592x360	G4	Coarse 65%	287x287x360	3	850	50
GB-G3-P6-592x592x600	G3	Coarse 50%	592x592x600	6	3400	30
GB-G3-P5-490x592x600	G3	Coarse 50%	490x592x600	5	2800	30
GB-G3-P3-287x592x600	G3	Coarse 50%	287x592x600	3	1700	30
GB-G3-P3-287x592x600	G3	Coarse 50%	287x287x600	3	850	30
GB-G4-P6-592x592x600	G4	Coarse 65%	592x592x600	6	3400	40
GB-G4-P5-490x592x600	G4	Coarse 65%	490x592x600	5	2800	40
GB-G4-P3-287x592x600	G4	Coarse 65%	287x592x600	3	1700	40
GB-G4-P3-287x287x600	G4	Coarse 65%	287x287x600	3	850	40

Other dimensions and depth sizes are available on request.

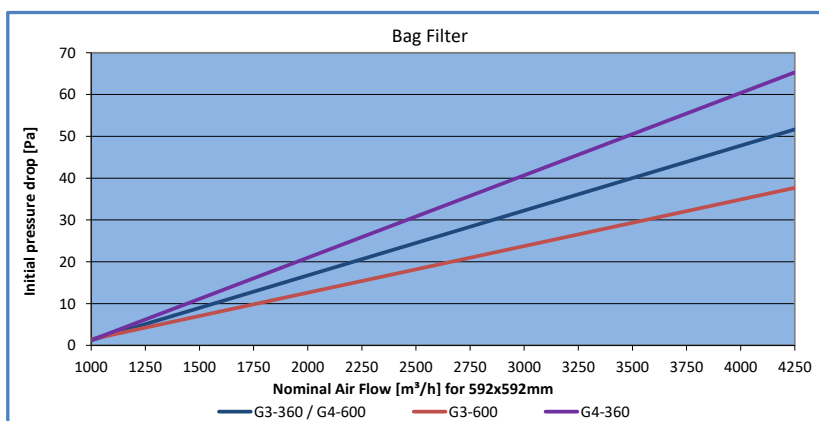

GB-G4-P6-592x592x360		
Filter Model*	Z-Line	GB
Filter Class (EN779)	G4	G4
Filter Class (ISO16890)	Coarse 65%	Coarse 65%
Pocket Number	6	P6
Filter Dimensions	WxH (mm)	592x592
Filter Depth	360mm	360

* Use "GRB" to define Rigid Bag model.