


CEILING TYPE FILTER

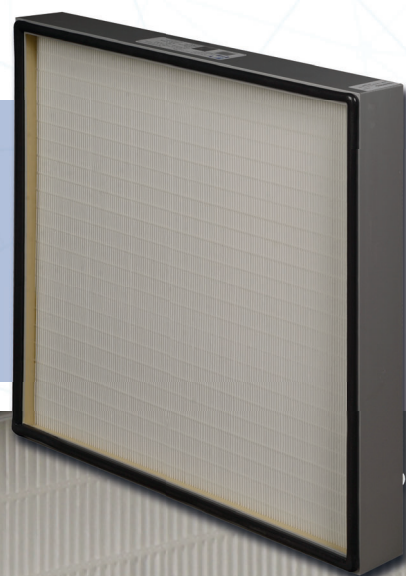

Applications:

Capturing fine particles
Second or final stage filter in HVAC
Pre-filter for HEPA filters

Highlights:

- Large filtration area
- Simple and light weight
- High dust holding capacity
- Low initial pressure drop

Filter Standard:	ISO 16890	Max. Operating Temperature:	80°C
Filter Class:	ISO ePM1 - ISO ePM2,5 - ISO ePM10	Sealing Compound:	Two component polyurethane
Media:	Glass Fibre	Seperators:	Hotmelt
Frame:	Anodized extruded aluminium, MDF	Faceguard:	Aluminium sheet (powder coated)
Rec. Final Pressure Drop EN13053:	Initial ΔP +100 Pa or initial ΔP x3 whichever is lower	Gasket:	EPDM flat, EPDM flat continous and PU foam

CEILING TYPE FILTER FC 78

Filter Model	Filter Class		Dimensions WxHxD (mm)	Filtration Area (m ²)	Pleat Height (mm)	Nominal Airflow (m ³ /h)	Initial Pressure Drop (Pa)
	EN 779 (cancelled)	ISO 16890					
FC-M6-A-1-305-305-78-FC-P	M6	ePM10 70%	305x305x78	2,3	50	750	80
FC-M6-A-1-305-610-78-FC-P	M6	ePM10 70%	305x610x78	4,5	50	1500	80
FC-M6-A-1-610-610-78-FC-P	M6	ePM10 70%	610x610x78	9	50	3000	80
FC-F7-A-1-305-305-78-FC-P	F7	ePM1 55%	305x305x78	2,3	50	750	115
FC-F7-A-1-305-610-78-FC-P	F7	ePM1 55%	305x610x78	4,5	50	1500	115
FC-F7-A-1-610-610-78-FC-P	F7	ePM1 55%	610x610x78	9	50	3000	115
FC-F8-A-1-305-305-78-FC-P	F8	ePM1 70%	305x305x78	2,3	50	750	120
FC-F8-A-1-305-610-78-FC-P	F8	ePM1 70%	305x610x78	4,5	50	1500	120
FC-F8-A-1-610-610-78-FC-P	F8	ePM1 70%	610x610x78	9	50	3000	120
FC-F9-A-1-305-305-78-FC-P	F9	ePM1 80%	305x305x78	2,3	50	750	145
FC-F9-A-1-305-610-78-FC-P	F9	ePM1 80%	305x610x78	4,5	50	1500	145
FC-F9-A-1-610-610-78-FC-P	F9	ePM1 80%	610x610x78	9	50	3000	145

"Other dimensions are available on request."
 "Differential Pressure Tolerance (±10% + 5 Pa) or (10 Pa + 5 Pa) whichever is greater"

CEILING TYPE FILTER CODE CONFIGURATION

Filter Type	Filter Class	Frame	Pleat Height	Dimensions (mm)	Faceguard	Gasket
FC : Ceiling Type Filter	M6 F7 F8 F9	A: Aluminium M: MDF	1: 50 mm 2: 65 mm 3: 75 mm 4: 85 mm 5: 90 mm 6: 100 mm 7: 125 mm	610x610x78	FW: Without FC: On Clean Side FD: On Dirty Side FB: On Both Sides	W: Without P: Continuous Pu Foam PP: Pu Foam on Both Sides E: EPDM EE: EPDM Flat On Both Sides C: Continuous Grey EPDM CC: Grey EPDM on Both Sides

CEILING TYPE FILTER FC 150

Filter Model	Filter Class		Dimensions WxHxD (mm)	Filtration Area (m ²)	Pleat Height (mm)	Nominal Airflow (m ³ /h)	Initial Pressure Drop (Pa)
	EN 779 (cancelled)	ISO 16890					
FC-M6-A-7-305-305-150-FC-P	M6	ePM10 70%	305x305x150	4,5	125	750	60
FC-M6-A-7-305-610-150-FC-P	M6	ePM10 70%	305x610x150	9	125	1500	60
FC-M6-A-7-610-610-150-FC-P	M6	ePM10 70%	610x610x150	18	125	3000	60
FC-F7-A-7-305-305-150-FC-P	F7	ePM10 55%	305x305x150	4,5	125	750	80
FC-F7-A-7-305-610-150-FC-P	F7	ePM10 55%	305x610x150	9	125	1500	80
FC-F7-A-7-610-610-150-FC-P	F7	ePM1 55%	610x610x150	18	125	3000	80
FC-F8-A-7-305-305-150-FC-P	F8	ePM1 70%	305x305x150	4,5	125	750	100
FC-F8-A-7-305-610-150-FC-P	F8	ePM1 70%	305x610x150	9	125	1500	100
FC-F8-A-7-610-610-150-FC-P	F8	ePM1 70%	610x610x150	18	125	3000	100
FC-F9-A-7-305-305-150-FC-P	F9	ePM1 80%	305x305x150	4,5	125	750	130
FC-F9-A-7-305-610-150-FC-P	F9	ePM1 80%	305x610x150	9	125	1500	130
FC-F9-A-7-610-610-150-FC-P	F9	ePM1 80%	610x610x150	18	125	3000	130

"Other dimensions are available on request."

"Differential Pressure Tolerance (±10% + 5 Pa) or (10 Pa + 5 Pa) whichever is greater"