


# EFFICIENT PANEL FILTER

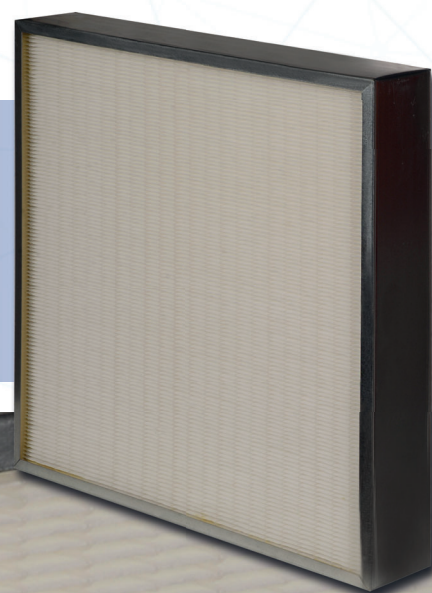

## Applications:

Final filter for HVAC or cleanrooms

## Highlights:

- Tested and certified acc to EN 1822 - ISO 29463 for H13 - H14
- Large filtration area
- Simple and light weight
- Low initial pressure drop

Filter Standard:	EN 1822 and ISO 29463	Max. Operating Temperature:	80°C
Filter Class:	E10 - E11 - E12 - H13 - H14	Faceguard:	Available on request
Media:	Glass Fiber	Gasket:	Available on request
Frame:	Galvanized, Stainless Steel	Sealing Compound:	Two component polyurethane
Rec. Final Pressure Drop:	Initial pressure drop x2, (max. 600 Pa)	Seperators:	Hotmelt



## EFFICIENT PANEL FILTER / G48

Filter Model	Filter Class		Dimensions WxHxD (mm)	Filtration Area (m <sup>2</sup> )	Nominal Airflow (m <sup>3</sup> /h)	Initial Pressure Drop (Pa)
	EN 1822	ISO 29463				
HP-E10-G-287-287-48-FW-W	E10	-	287x287x48	1,5	300	190
HP-E10-G-287-592-48-FW-W	E10	-	287x592x48	3	600	190
HP-E10-G-592-592-48-FW-W	E10	-	592x592x48	6	1200	190
HP-E11-G-287-287-48-FW-W	E11	ISO 15 E	287x287x48	1,5	250	200
HP-E11-G-287-592-48-FW-W	E11	ISO 15 E	287x592x48	3	500	200
HP-E11-G-592-592-48-FW-W	E11	ISO 15 E	592x592x48	6	1000	200
HP-E12-G-287-287-48-FW-W	E12	ISO 25 E	287x287x48	1,5	130	170
HP-E12-G-287-592-48-FW-W	E12	ISO 25 E	287x592x48	3	275	170
HP-E12-G-592-592-48-FW-W	E12	ISO 25 E	592x592x48	6	570	170
HP-H13-G-287-287-48-FC-P	H13	ISO 35 H	287x287x48	1,5	130	180
HP-H13-G-287-592-48-FC-P	H13	ISO 35 H	287x592x48	3	275	180
HP-H13-G-592-592-48-FC-P	H13	ISO 35 H	592x592x48	6	570	180
HP-H14-G-287-287-48-FC-P	H14	ISO 45 H	287x287x48	1,5	130	200
HP-H14-G-287-592-48-FC-P	H14	ISO 45 H	287x592x48	3	275	200
HP-H14-G-592-592-48-FC-P	H14	ISO 45 H	592x592x48	6	570	200

"Other dimensions are available on request."  
"Differential Pressure Tolerance ±10%"

### EFFICIENT PANEL FILTER CODE CONFIGURATION

Filter Type	Filter Class	Frame	Dimensions (mm)	Faceguard	Gasket
HP : Efficient Panel Filter	E10 E11 E12 H13 H14	G : Galvanized	592x592x96	FW: Without FC: On Clean Side FD: On Dirty Side FB: On Both Sides	W: Without P: Continuous Pu Foam PP: Pu Foam on Both Sides E: EPDM EE: EPDM Flat On Both Sides C: Continuous Grey EPDM CC: Grey EPDM on Both Sides

## EFFICIENT PANEL FILTER / G96

Filter Model	Filter Class		Dimensions WxHxD (mm)	Filtration Area (m <sup>2</sup> )	Nominal Airflow (m <sup>3</sup> /h)	Initial Pressure Drop (Pa)
	EN 1822	ISO 29463				
HP-E10-G-287-287-96-FW-W	E10	-	287x287x96	3	600	175
HP-E10-G-287-592-96-FW-W	E10	-	287x592x96	6	1200	175
HP-E10-G-592-592-96-FW-W	E10	-	592x592x96	12	2400	175
HP-E11-G-287-287-96-FW-W	E11	ISO 15 E	287x287x96	3	500	150
HP-E11-G-287-592-96-FW-W	E11	ISO 15 E	287x592x96	6	1000	150
HP-E11-G-592-592-96-FW-W	E11	ISO 15 E	592x592x96	12	2000	150
HP-E12-G-287-287-96-FW-W	E12	ISO 25 E	287x287x96	3	260	85
HP-E12-G-287-592-96-FW-W	E12	ISO 25 E	287x592x96	6	550	85
HP-E12-G-592-592-96-FW-W	E12	ISO 25 E	592x592x96	12	1140	85
HP-H13-G-287-287-96-FC-P	H13	ISO 35 H	287x287x96	3	260	85
HP-H13-G-287-592-96-FC-P	H13	ISO 35 H	287x592x96	6	550	85
HP-H13-G-592-592-96-FC-P	H13	ISO 35 H	592x592x96	12	1140	85
HP-H14-G-287-287-96-FC-P	H14	ISO 45 H	287x287x96	3	260	110
HP-H14-G-287-592-96-FC-P	H14	ISO 45 H	287x592x96	6	550	110
HP-H14-G-592-592-96-FC-P	H14	ISO 45 H	592x592x96	12	1140	110

"Other dimensions are available on request."  
 "Differential Pressure Tolerance ±10%"